


NOTES:
 1. DUE TO OUR CONTINUOUS IMPROVEMENT PROGRAM, ALL MODELS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

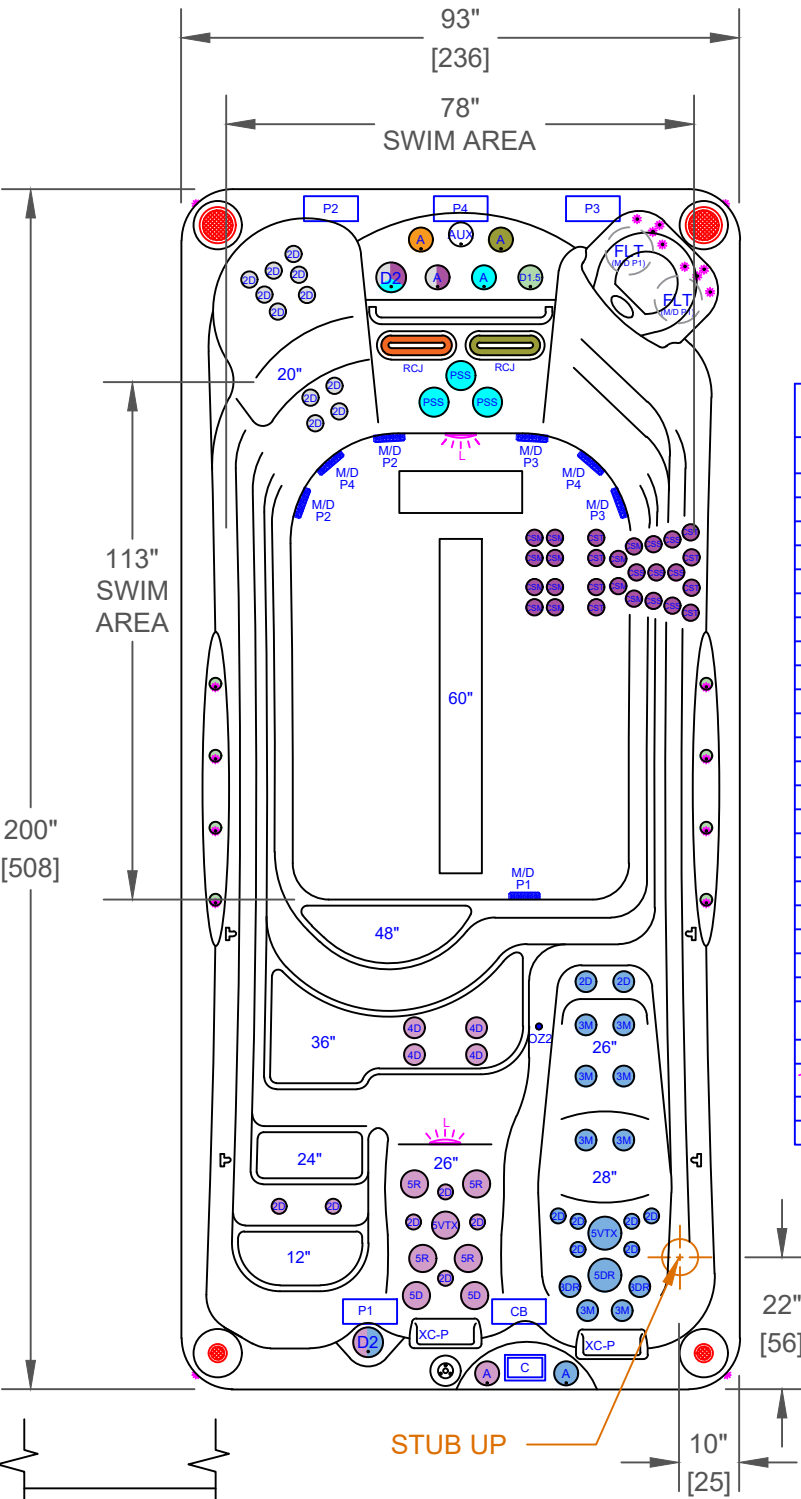


	PUMP 1
	PUMP 2
	PUMP 3

	PUMP 4
	PUMP 1
	PUMP 2
	PUMP 3
	PUMP 4
	CONTROL BOX

F-1680X - LEGEND

SYMB.	DESCRIPTION	PART NUMBER	QTY.
2D	2" CLUSTER STORM DIRECTIONAL VECTOR X	PLUCS2440019S-HLG	25
3M	3" MINI STORM MESSAGE DIRECTIONAL VECTOR X	PLUCS2445059S-HLG	8
3DR	3" MINI STORM TWISTER VECTOR X	PLUCS2441049S-HLG	2
4D	4.5" POLY STORM DIRECTIONAL VECTOR X	PLUCS2446009S-HLG	4
5D	5" POWER STORM DIRECTIONAL VECTOR X	PLUCS2447009S-HLG	2
5R	5" POWER STORM ROTO VECTOR X	PLUCS2247029S-HLG	4
5DR	5" POWER STORM TWISTER VECTOR X	PLUCS2447049S-HLG	1
5VTX	5" POWER STORM TRI DIRECTIONAL VECTOR X	PLUCS2447019S-HLG	2
CST	CLUSTER STORM AIR MAX TRI-STREAM	PLU239-8918S-HLG	8
CSS	CLUSTER STORM AIR MAX SOLO-STREAM	PLU239-8908S-HLG	11
CSM	CLUSTER STORM AIR MAX MULTI-STREAM	PLU239-8928S-HLG	8
RCJ	RIP CURRENT JETS	PLU210-5168S-HLG	2
PSS	POWER STREAM JETS	PLU210-0838S	3
D2	ORION 2" WATER DIVERTER VALVE	PLUCS600-7609-CDHL	1
A	ORION AIR CONTROL VALVE	PLUCS660-7609-CDHL	4
-	27" STAINLESS STEEL HANDRAIL		1
FLT	50 SQ. FT. BIO-CLEAN FILTER WITH TELEWEIR	517-4609LC-HLG	2
M/D	5" MAIN DRAIN 2.5"S	PLU644-5419-HLG V	7
TH	TETHER ANCHOR		1
EA	FITNESS ANCHOR		6
XC-P	TEXTURED CASCADE PILLOW (WHITE)		2
C	TOUCH CONTROL BLACK w/ AUXILIARY PANEL		1
OZ2	TWIN PURE SILK™ DUAL OZONATOR WITH MAZZIE INJECTORS AND MIXING CHAMBERS		1
-	LED DUAL HYDRO-STREAMERS PLUS™ WITH D1.5 VALVE		1
	ELITE III SPOTLIGHT 4x CABINET CORNERS LED LIGHTING & STAINLESS STEEL ACCENTS		1
L	5" MULTI COLORED LED LIGHT		2
-	LED CAL SPAS LOGO		1



OPTIONS

SYMB.	DESCRIPTION	OPTION NUMBER
-	DYNAMIC FLOW CONTROL WITH VARIABLE SPEED PUMPS *CHANGES EQUIPMENT TO GECKO	OPT25-139VSP3
-	PURE CURE UV PURIFICATION SYSTEM	OPT25-191B
-	PREMIUM HORIZONTAL CABINET PANELS COLORS: TEAK, WEATHERED WHITE	OPT25-E982C-2
-	CAL GRIP DECKING (FLOOR & STEPS)	OPT25-CG1680-SBB
-	CAL CONNECT RF MODULE	OPT25-168RF
	FREEDOM SOUND SYSTEM BLUETOOTH, POWERED SUBWOOFER AND 4X SPEAKERS (2X 3" BLACK 2X 6" WHITE)	OPT25-F5622
-	THERMO-GUARD FULL FOAM (THIS OPTION WILL REPLACE THERMO LAYER)	OPT25-900-XL

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CAL SPAS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CAL SPAS IS PROHIBITED.		 CAL SPAS INC. 1442 EAST NINTH STREET, POMONA, CA 91766	
SPECIFICATIONS		TITLE	JET LAYOUT - STD
DIMENSION (in)	93"x170"x63"	LINE	SWIM-PRO X-SERIES
DIMENSION (cm)	236x432x160	MODEL	2025 SPA LINE SWIM-PRO
DRY WEIGHT	2450 LBS [1111 Kg]	NUM	F-1680X
FILLED WEIGHT	24565 LBS [11142 Kg]	DWG NO.	CS003519
WATER CAP.	2650 GAL [10031 L]	REV	A
SCALE NTS		SHEET 1 OF 1	